


GasMultiBloc® Double solenoid valve

Pre-mount filter



MB-...415
MB-...420
DMV-...507
DMV-...512
DMV-...520

7.40

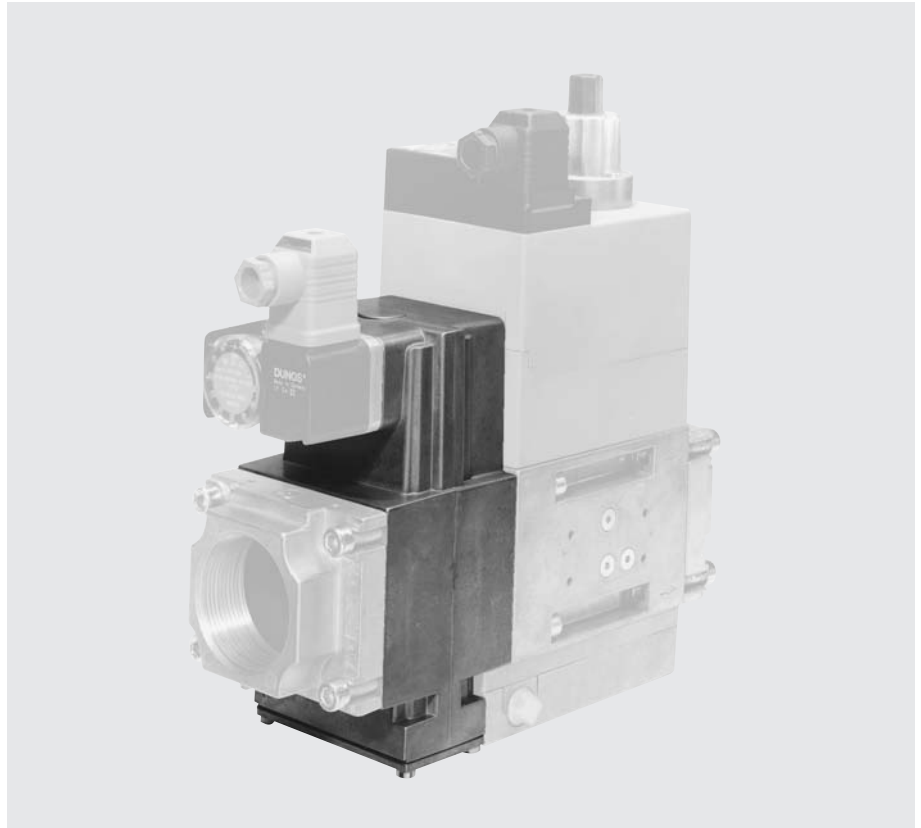

Technical description

Microfilter for gas pipes with high dust retention capacity for Dungs multiple actuators. Prepared for mounting on:

MB-D...415
MB-D...420
MB-ZR...415
MB-ZR...420
MB-VEF 415
MB-VEF 420

DMV-D...507/11
DMV-D...512/11
DMV-D...520/11

DMV-ZRD...507/11
DMV-ZRD...512/11
DMV-ZRD...520/11


DMV-SE 507/11
DMV-SE 512/11
DMV-SE 520/11

DMV-VEF 507/11
DMV-VEF 512/11
DMV-VEF 520/11


Application

Microfilter to protect downstream appliances. Filters are suitable for gases of gas families 1, 2, 3 and other neutral gaseous media.


Flow characteristic of pre-mount filter

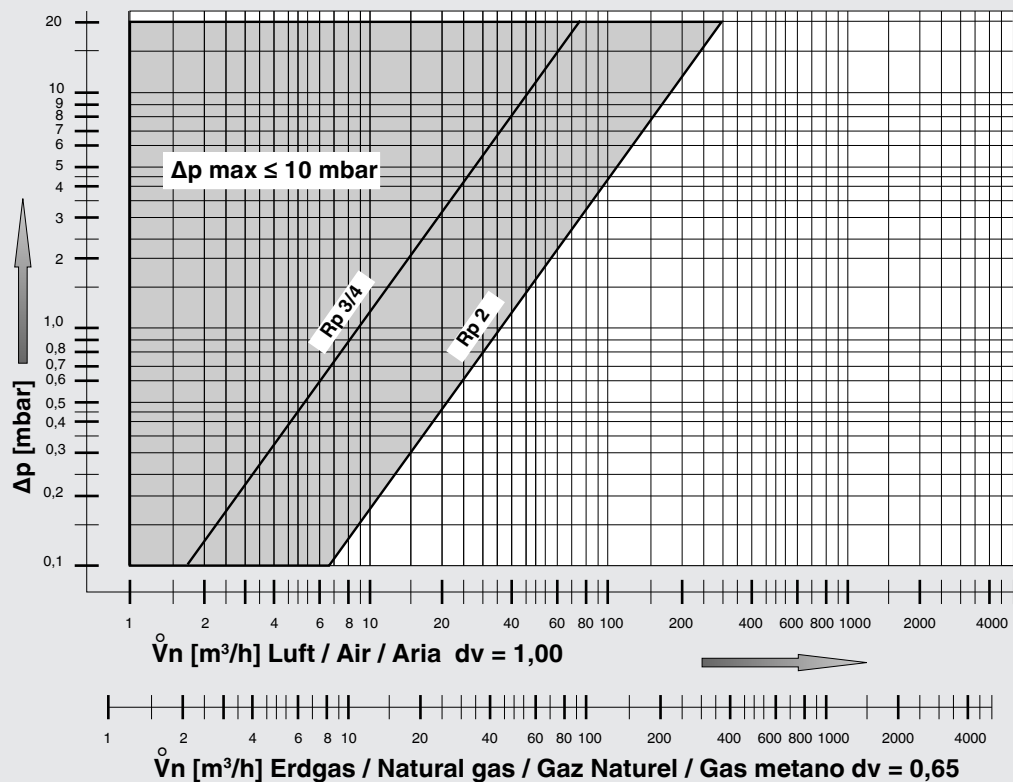


Flow characteristics of MB-...415 - 420

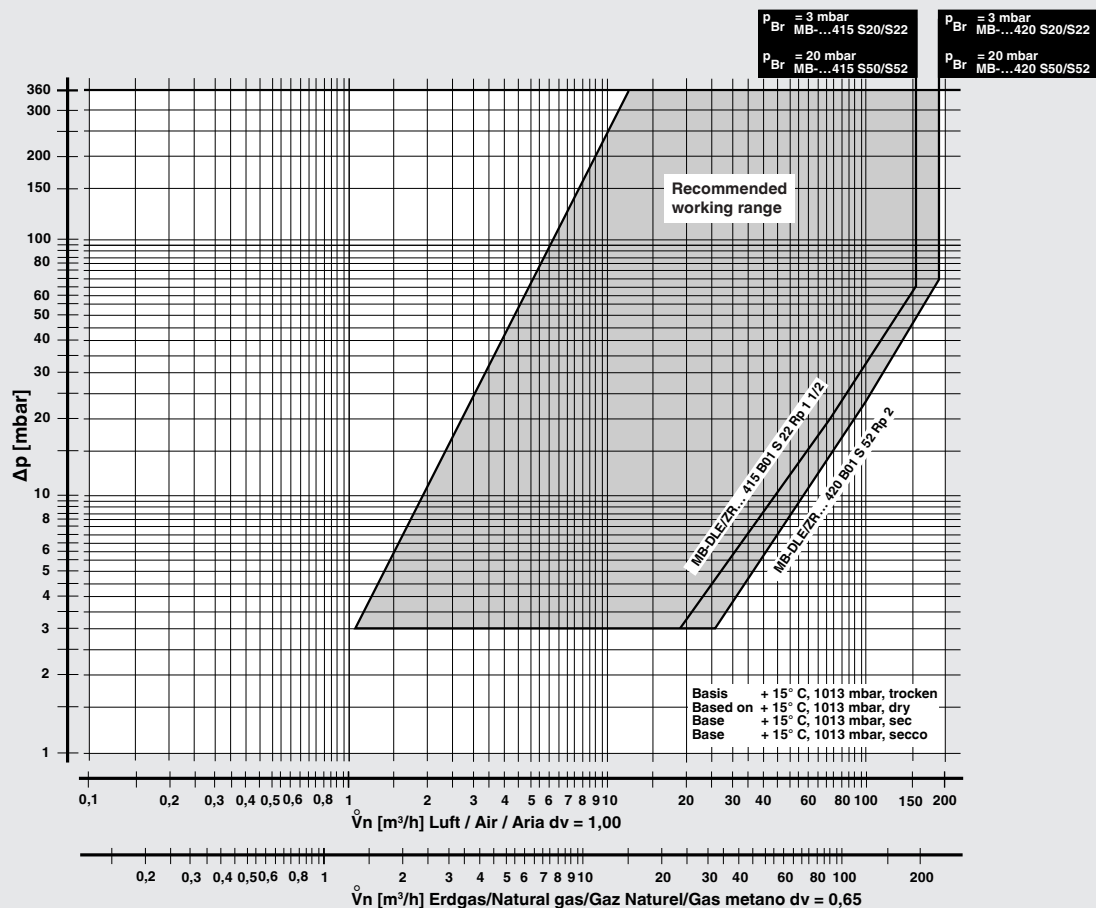

Flow characteristics of MB-VEF 415 - 420

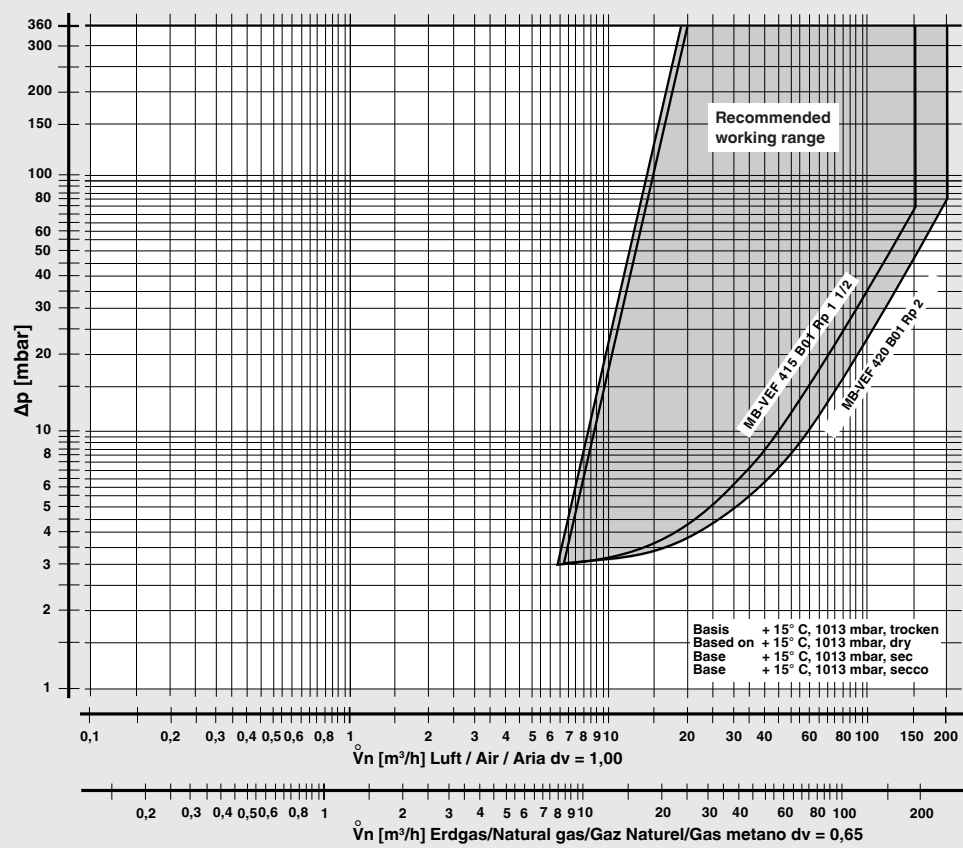

Flow characteristics of DMV-SE 507 - 520
Flow characteristics of DMV-VEF 507 - 520

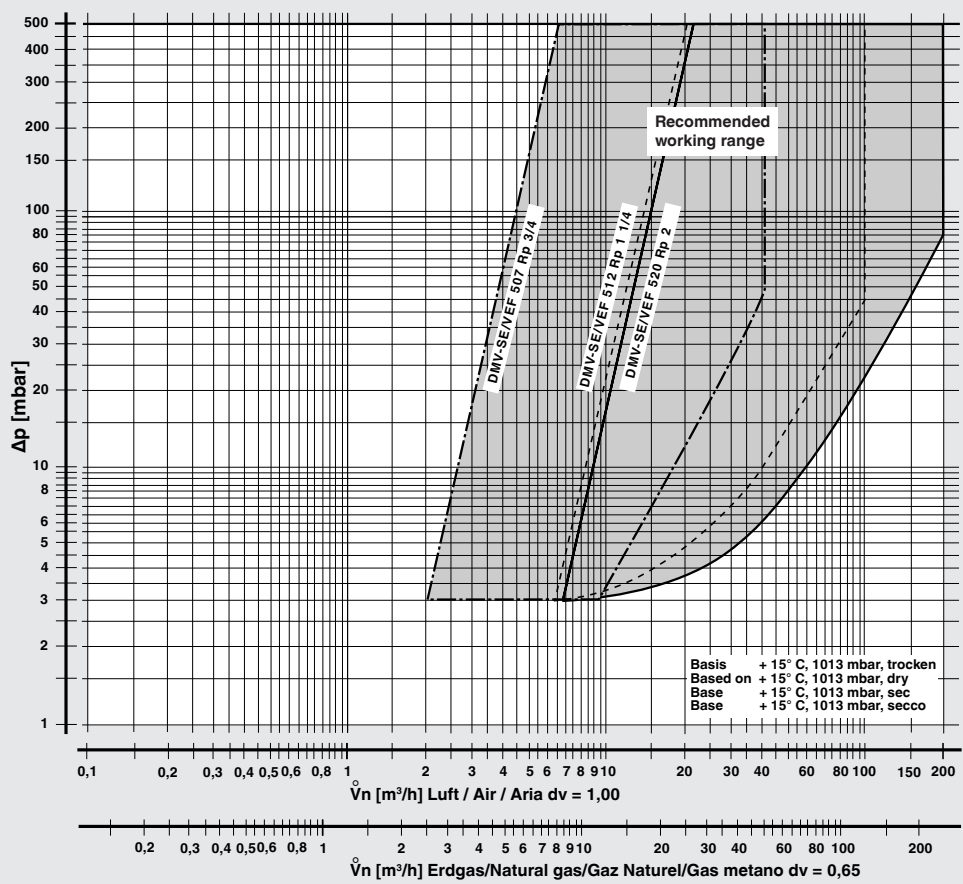


GasMultiBloc®
Double solenoid valve

Pre-mount filter
MB-...415
MB-...420
DMV-...507
DMV-...512
DMV-...520

DUNGS®
Combustion Controls

Dimensions [mm]

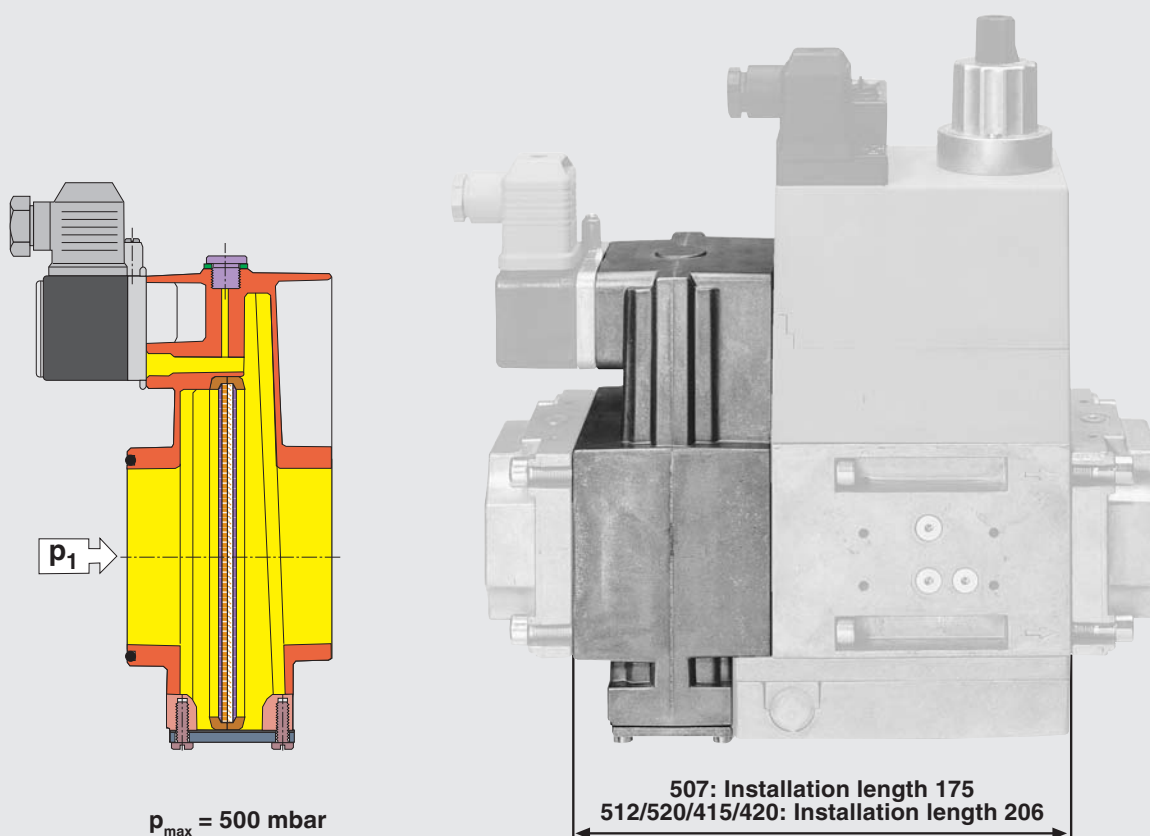

Designation	Order No.	
Pre-mount filter, complete, for Rp 3/4, Rp 1	232 440	Gas pressure switch GW A5 not contained in scope of supply
Spare filter insert	238 653	
Pre-mount filter, complete, for Rp 1 1/2, Rp 2	226 342	
Spare filter insert	226 997	

We reserve the right to make any changes in the interest of technical progress.

Head Offices and Factory
Karl Dungs GmbH & Co. KG
Siemensstraße 6-10
D-73660 Urbach, Germany
Telephone +49 (0)7181-804-0
Fax +49 (0)7181-804-166

Postal address
Karl Dungs GmbH & Co. KG
Postfach 12 29
D-73602 Schorndorf, Germany
e-mail info@dungs.com
Internet www.dungs.com