

GAS FILTER 1 ¼", 1 ½" and 2" – Pmax 6 bar



Code	Description	Dimension	Pmax
GF032	Gas filter	1 ¼"	6 bar
GF040	Gas filter	1 ½"	6 bar
GF050	Gas filter	2"	6 bar
GFD32	Gas filter	DN32	6 bar
GFD40	Gas filter	DN40	6 bar
GFD50	Gas filter	DN50	6 bar

GF032-TPIO	Gas filter with test point in/out	1 ¼"	6 bar
GF040-TPIO	Gas filter with test point in/out	1 ½"	6 bar
GF050-TPIO	Gas filter with test point in/out	2"	6 bar
GFD32-TPIO	Gas filter with test point in/out	DN32	6 bar
GFD40-TPIO	Gas filter with test point in/out	DN40	6 bar
GFD50-TPIO	Gas filter with test point in/out	DN50	6 bar

GF032-SP	Gas filter with screw plugs	1 ¼"	6 bar
GF040-SP	Gas filter with screw plugs	1 ½"	6 bar
GF050-SP	Gas filter with screw plugs	2"	6 bar
GFD32-SP	Gas filter with screw plugs	DN32	6 bar
GFD40-SP	Gas filter with screw plugs	DN40	6 bar
GFD50-SP	Gas filter with screw plugs	DN50	6 bar

TECHNICAL FEATURES

Operation maximum pressure 6 bar

Working Temperature - 20 °C – + 60 °C

Filtration 50 Micron

Use Non – aggressive gases – Family 1 – 2 – 3 and air

Cartridge element Viledon cartridge

Inlet - Outlet Connection Thread gas 1 ¼" 1 ½" 2" – ISO 228
DN32 DN40 DN50 - Sliding Aluminium flange PN10

Complete Body Die – Cast Aluminium Gd – AlSi12Cu - EN AB 46100

Seals NBR

Approval PED

Optional:


- Test point – NPT ¼"

- Screw – NPT ¼"


- Peters plug

- Manometer

- DP clogging indicator

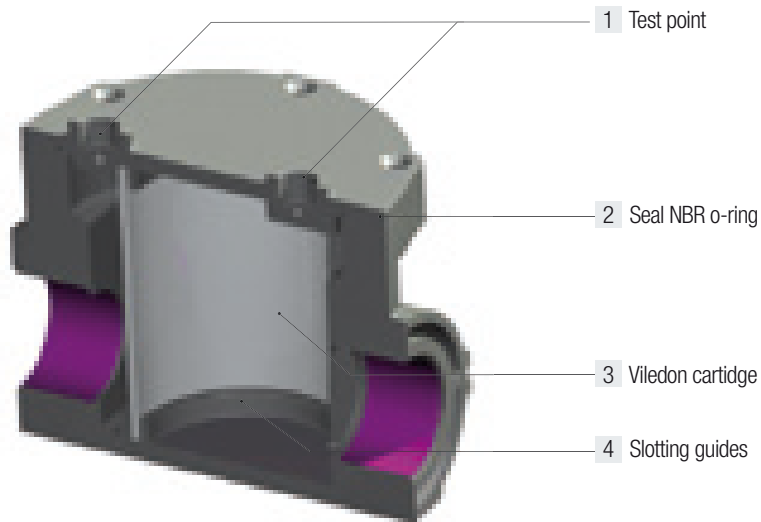

FLOW CHART

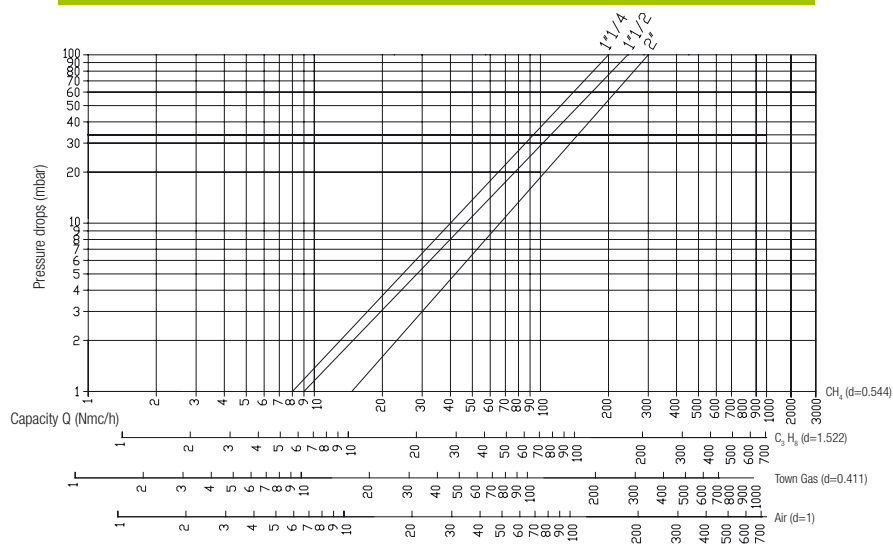

DIMENSIONS (mm) and WEIGHT (kgs)				
Dimension	A	B	C	Weight
1 1/4"	164	131.7	152.5	1,63
1 1/2"	164	131.7	152.5	1,55
2"	164	131.7	152.5	1,45

