

GAS SOLENOID VALVE - Manual reset - Normally close - 550 mbar - DN65 - DN80 - DN100



Code	Description	Dimension	Type	Pmax
VR660	Manual solenoid valve	DN65	NC	550 mbar
VR670	Manual solenoid valve	DN80	NC	550 mbar
VR680	Manual solenoid valve	DN100	NC	550 mbar
VR750	Manual solenoid valve	DN125	NC	550 mbar
VR751	Manual solenoid valve	DN150	NC	550 mbar

TECHNICAL FEATURES

Power supply 230 Vca – 24 Vcc/Vca – 12 Vcc/Vca

Body Die - Cast Aluminium Gd - AISi12Cu - EN AB 46100


Working temperature -15°C / +70°C

Closing time < 1 sec


Max. pressure 550 mbar

Protection level IP65

Connections Flanged DN65 - DN80 - DN100

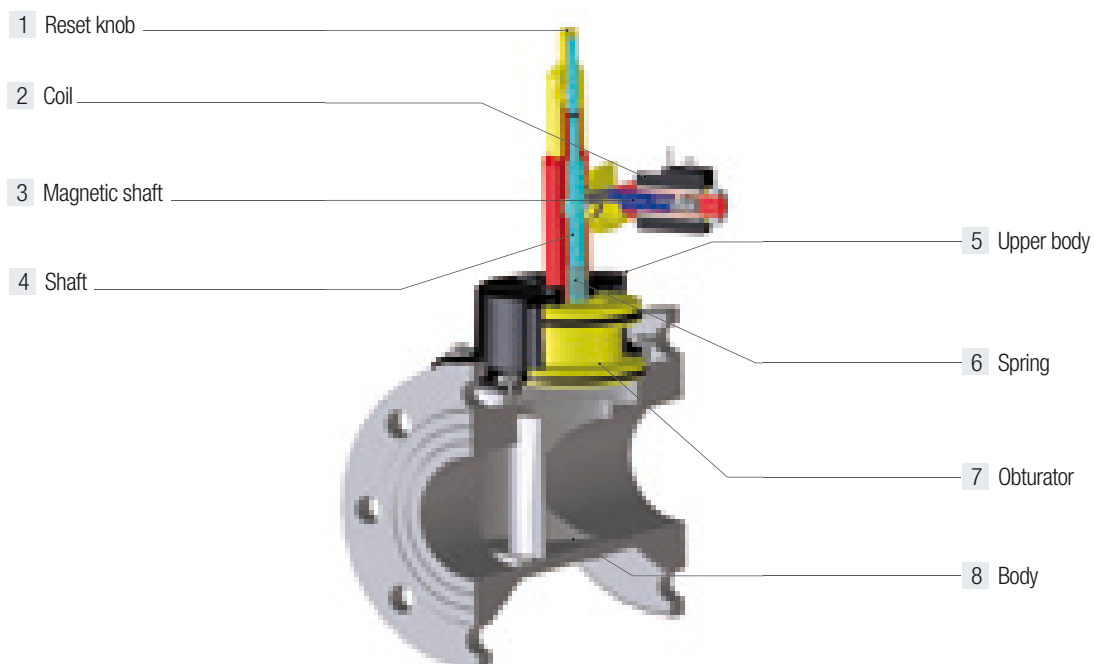

FLOW CHART

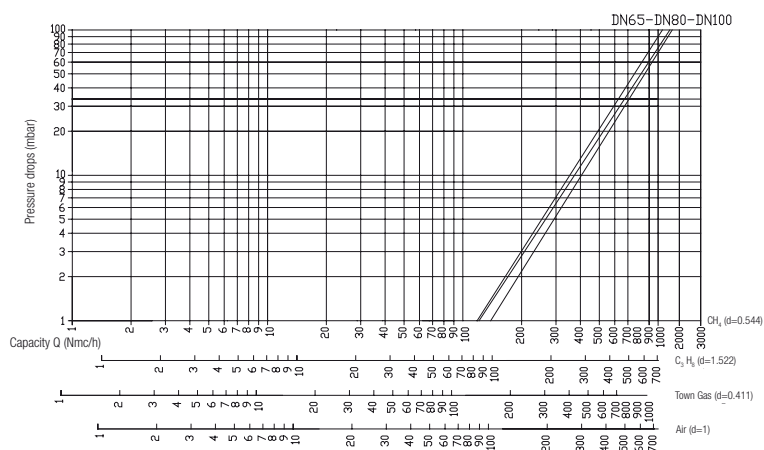

Dimension	Flow (mc/H)	Power	A (mm)	B (mm)	Approvals	Power supply
DN65 2" ½	170	6 W	246	395	Dir.97/23/CE-EN161	12Vcc
DN65 2" ½	170	9 VA	246	395	Dir.97/23/CE-EN161	230Vac
DN80 3"	170	6 W	265	395	Dir.97/23/CE-EN161	12Vcc
DN80 3"	170	9 VA	265	395	Dir.97/23/CE-EN161	230Vac
DN100 4"	280	6 W	265	420	Dir.97/23/CE-EN161	12Vcc
DN100 4"	280	9 VA	265	420	Dir.97/23/CE-EN161	230Vac
DN125 5"	280	23W	445	500	Dir.97/23/CE-EN161	12Vcc
DN125 5"	280	23W	445	500	Dir.97/23/CE-EN161	230Vac
DN150 6"	280	23W	445	500	Dir.97/23/CE-EN161	12Vcc
DN150 6"	280	23W	445	500	Dir.97/23/CE-EN161	230Vac

