

GAS SOLENOID VALVE - Manual reset - Normally open - 550 mbar - DN65 - DN80 - DN100



Code	Description	Dimension	Type	Pmax
VR560	Manual solenoid valve	DN65	NO	550 mbar
VR570	Manual solenoid valve	DN80	NO	550 mbar
VR580	Manual solenoid valve	DN100	NO	550 mbar

TECHNICAL FEATURES

Power supply 230 Vac – 24 Vac – 12 Vac

Body Die - Cast Aluminium Gd - AISi12Cu - EN AB 46100


Working temperature -15°C / +70°C

Closing time < 1 sec


Max. pressure 550 mbar

Protection level IP65

Connections flanged DN65 - DN80 - DN100

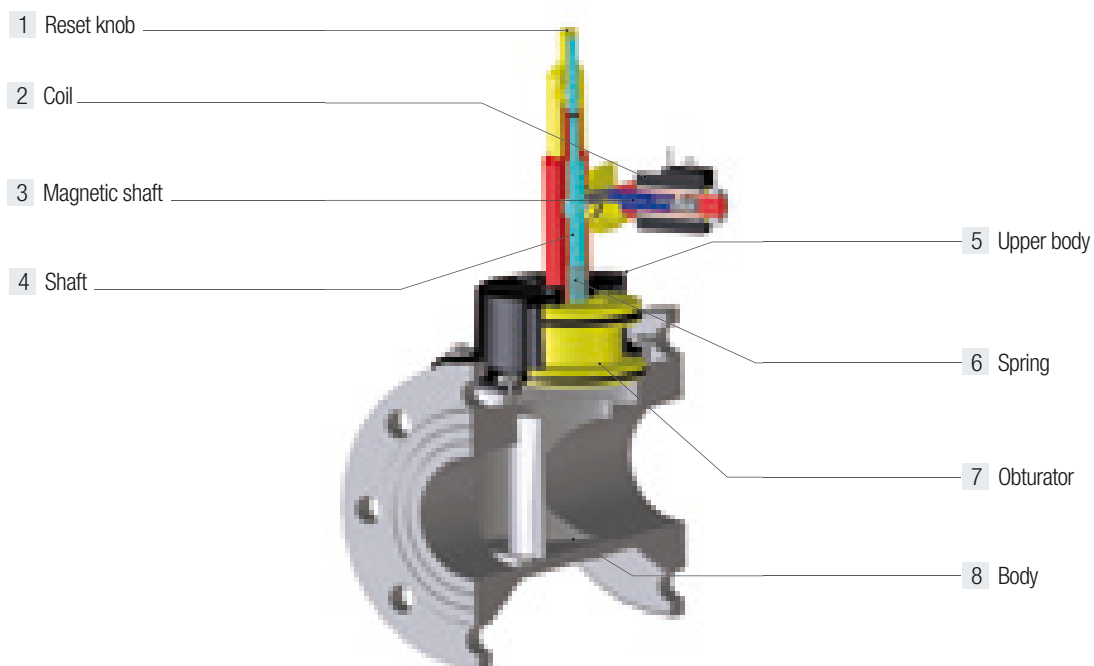

FLOW CHART

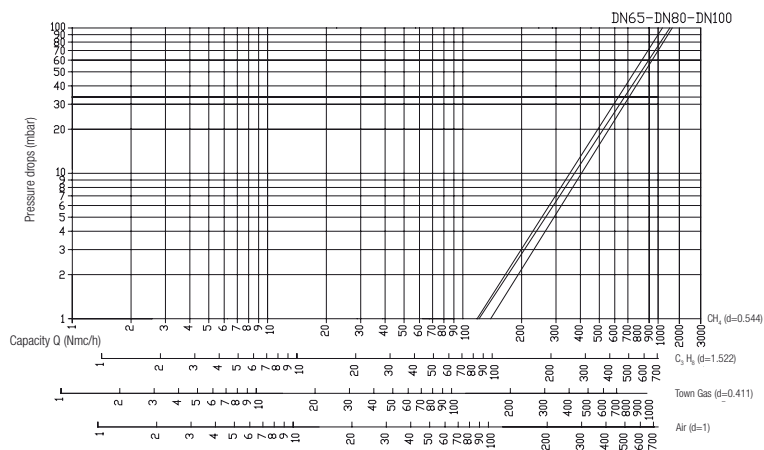

Dimension	Flow (mc/H)	Power	A (mm)	B (mm)	Approvals	Power supply
DN65 2" ½	170	19 W	246	395	Dir.97/23/CE (PED)	12Vcc
DN65 2" ½	170	17 VA	246	395	Dir.97/23/CE (PED)	230Vac
DN80 3"	170	19 W	265	395	Dir.97/23/CE (PED)	12Vcc
DN80 3"	170	17 VA	265	395	Dir.97/23/CE (PED)	230Vac
DN100 4"	280	19 W	265	420	Dir.97/23/CE (PED)	12Vcc
DN100 4"	280	17 VA	265	420	Dir.97/23/CE (PED)	230Vac

