


**GAS SOLENOID VALVE - Manual reset - Normally close - 6 bar -
1/2" - 3/4" - 1" - 1 1/4" - 1 1/2" - 2"**




Code	Description	Dimension	Type	Pmax
VR939	Manual solenoid valve	1/2"	NC	6 bar
VR940	Manual solenoid valve	3/4"	NC	6 bar
VR942	Manual solenoid valve	1"	NC	6 bar
VR943	Manual solenoid valve	1 1/4"	NC	6 bar
VR944	Manual solenoid valve	1 1/2"	NC	6 bar
VR945	Manual solenoid valve	2"	NC	6 bar

TECHNICAL FEATURES

Power supply	230 Vca – 24 Vcc/Vca – 12 Vcc/Vca
Body	Brass ST-CW617N – EN 12420 – Yellow Painted
Working temperature	-15°C / +70°C
Closing time	< 1 sec
Max. pressure	6 bar
Protection level	IP65
Connections	Thread 1/2" , 3/4" , 1" , 1" 1/4 , 1" 1/2" , 2" - ISO 228/1 thread

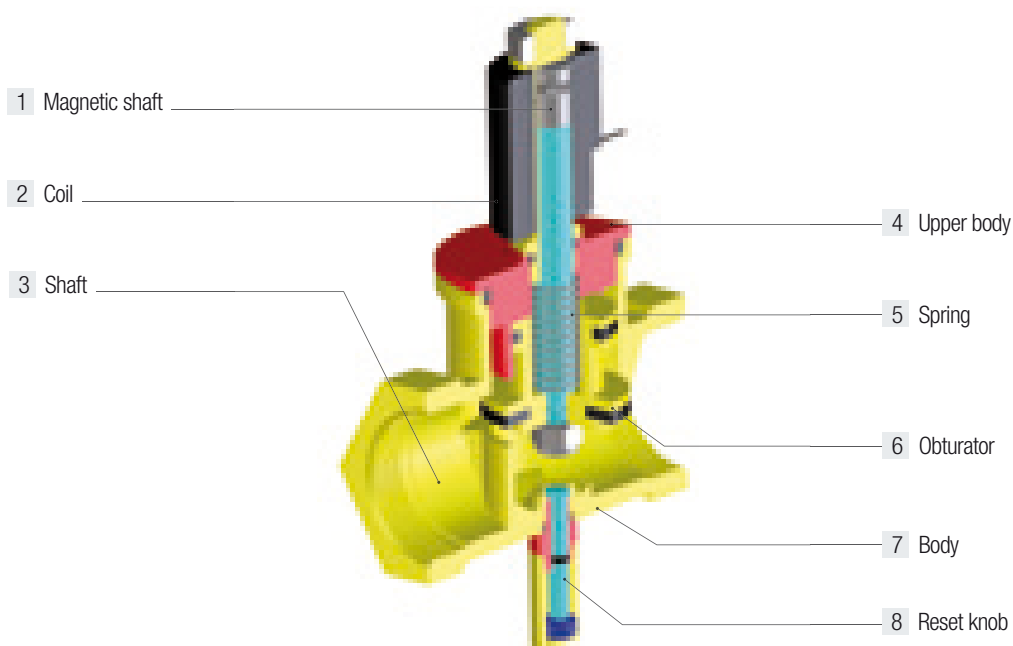

FLOW CHART

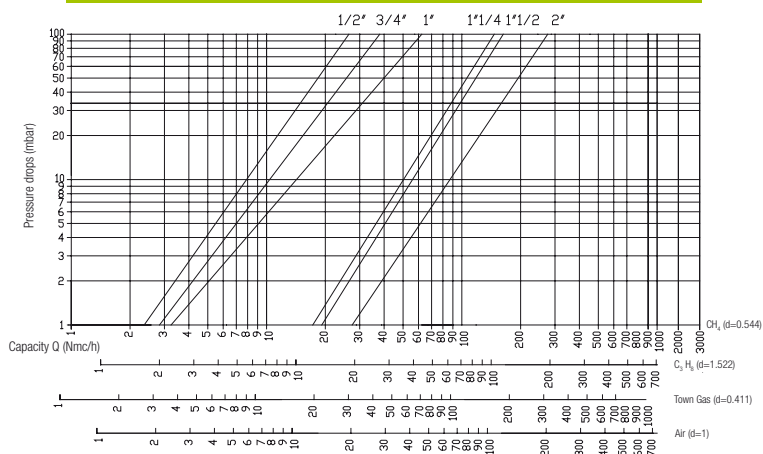

Dimension	Flow (mc/H)	Power	A (mm)	B (mm)	Approvals	Power supply
1/2"	4,5	6 W	86	165	Dir.97/23/CE-EN161	12Vcc
1/2"	4,5	9 VA	86	165	Dir.97/23/CE-EN161	230Vac
3/4"	6	6 W	86	165	Dir.97/23/CE-EN161	12Vcc
3/4"	6	9 VA	86	165	Dir.97/23/CE-EN161	230Vac
1"	13	6 W	93	175	Dir.97/23/CE-EN161	12Vcc
1"	13	9 VA	93	175	Dir.97/23/CE-EN161	230Vac
1" 1/4	40	6 W	114	200	Dir.97/23/CE-EN161	12Vcc
1" 1/4	40	9 VA	114	200	Dir.97/23/CE-EN161	230Vac
1" 1/2	50	6 W	114	200	Dir.97/23/CE-EN161	12Vcc
1" 1/2	50	9 VA	138	210	Dir.97/23/CE-EN161	230Vac
2"	80	6 W	138	210	Dir.97/23/CE-EN161	12Vcc
2"	80	9 VA	138	210	Dir.97/23/CE-EN161	230Vac

