

GAS SOLENOID VALVE - Manual reset - Normally open - 6 bar - DN65 - DN80 - DN100



Code	Description	Dimension	Type	Pmax
VR936	Manual solenoid valve	DN65	NO	6 bar
VR937	Manual solenoid valve	DN80	NO	6 bar
VR938	Manual solenoid valve	DN100	NO	6 bar

TECHNICAL FEATURES

Power supply 230 Vca – 24 Vcc/Vca – 12 Vcc/Vca

Body Die - Cast Aluminium Gd - AISi12Cu - EN AB 46100

Working temperature -15°C / +70°C


Closing time < 1 sec

Max. pressure 6 bar


Protection level IP65

Connections flanged UNI 2223

Weight Flanged DN65 - DN80 - DN100

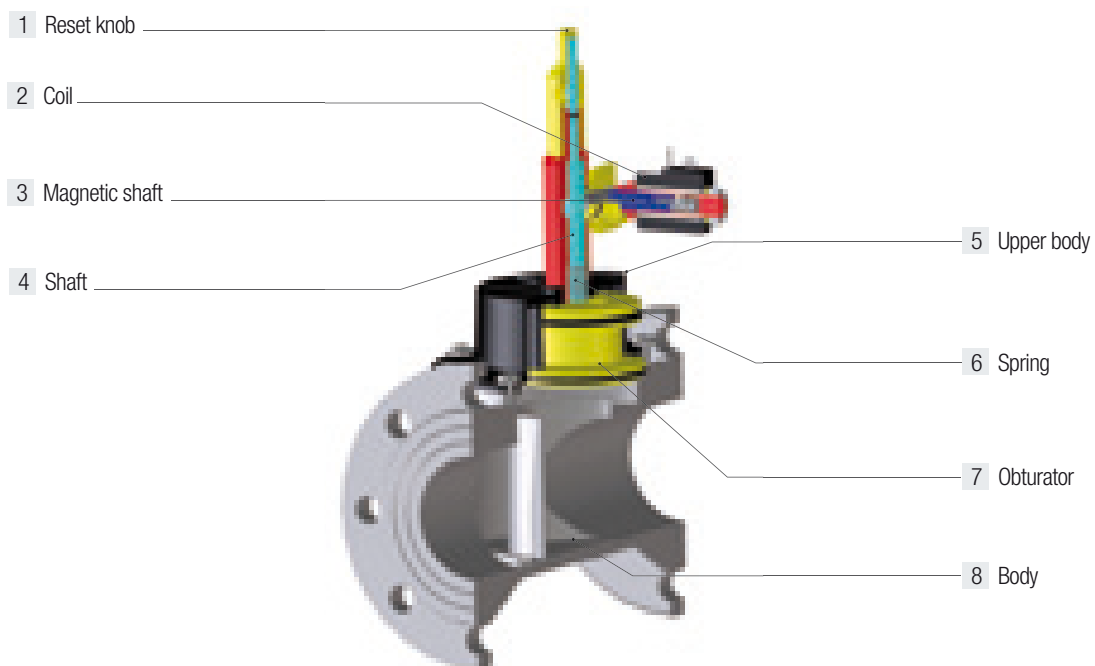

FLOW CHART

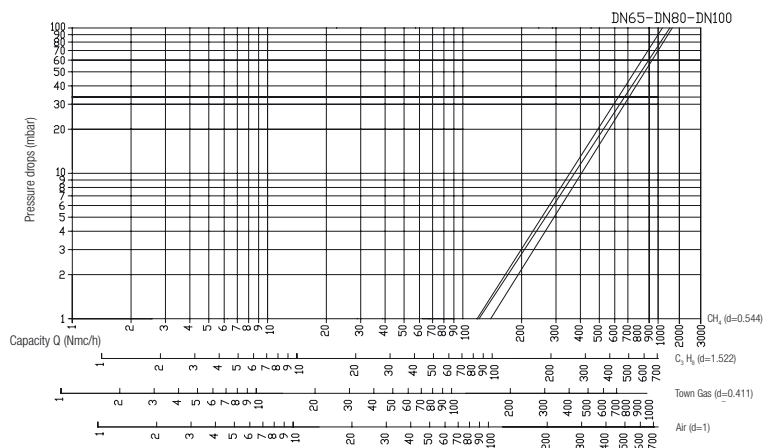

Dimension	Flow (mc/H)	Power	A (mm)	B (mm)	Approvals	Power supply
DN65 2" ½	170	17W	246	395	Dir.97/23/CE (PED)	230Vac
DN80 3"	170	17W	265	395	Dir.97/23/CE (PED)	230Vac
DN100 4"	280	17W	265	420	Dir.97/23/CE (PED)	230Vac

