

**GAS SOLENOID VALVE - Manual reset - Normally close - 550 mbar -
1/2" - 3/4" - 1" - 1 1/4" - 1 1/2" - 2" - With control position - CPI**



Code	Description	Dimension	Type	Pmax
VR423	Manual solenoid valve	1 1/4"	NC	550 mbar
VR424	Manual solenoid valve	1 1/2"	NC	550 mbar
VR425	Manual solenoid valve	2"	NC	550 mbar

TECHNICAL FEATURES

Power supply 230 Vac – 24 Vcc/Vac – 12 Vcc/Vac

Body Brass ST-CW617N – EN 12420 – Yellow Painted


Working temperature -15°C / +70°C

Closing time < 1 sec


Max. pressure 550 mbar

Protection level IP65

Connections Thread 1" 1/4 , 1" 1/2" , 2" - ISO 228/1 thread

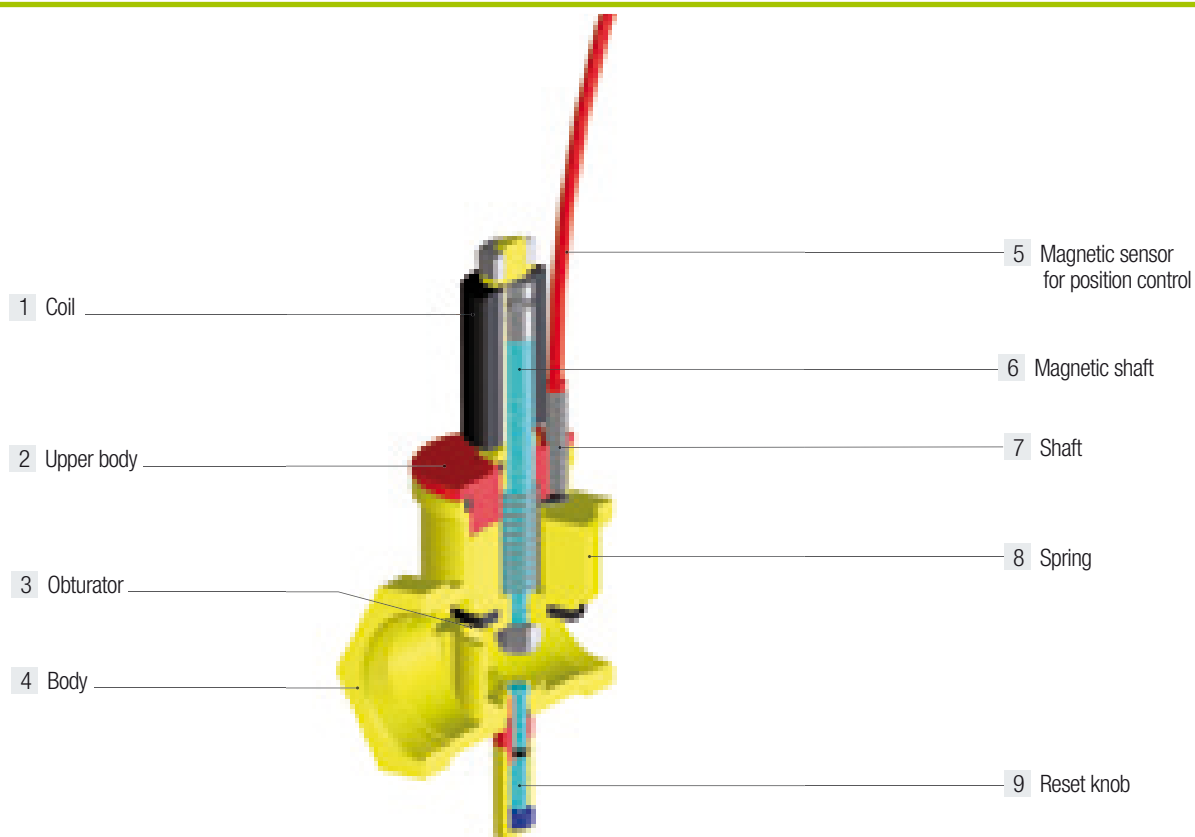

FLOW CHART

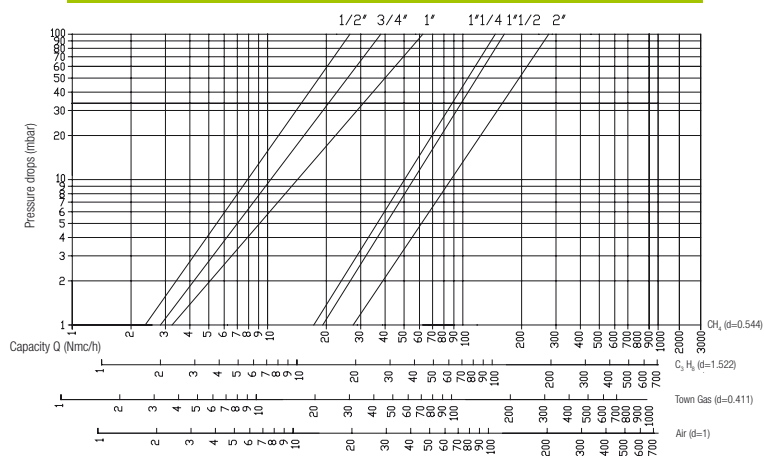

Dimension	Flow (mc/h)	Power	A (mm)	B (mm)	Approvals	Power supply
1" ¼	40	6 W	114	200	Dir.97/23/CE-EN161	12Vcc
1" ¼	40	9 VA	114	200	Dir.97/23/CE-EN161	230Vac
1" ½	50	6 W	114	200	Dir.97/23/CE-EN161	12Vcc
1" ½	50	9 VA	114	200	Dir.97/23/CE-EN161	230Vac
2"	80	6 W	138	210	Dir.97/23/CE-EN161	12Vcc
2"	80	9 VA	138	210	Dir.97/23/CE-EN161	230Vac

