

GAS SOLENOID VALVE - Manual reset - Normally close - 550 mbar / 6 bar - DN65 - DN80 - DN100 - With Control position CPI



Code	Description	Dimension	Type	Pmax
VR426	Manual solenoid valve	DN65	NC	550 mbar
VR427	Manual solenoid valve	DN80	NC	550 mbar
VR428	Manual solenoid valve	DN100	NC	550 mbar
VR429	Manual solenoid valve	DN125	NC	550 mbar
VR430	Manual solenoid valve	DN150	NC	550 mbar
VR486	Manual solenoid valve	DN65	NC	6 bar
VR487	Manual solenoid valve	DN80	NC	6 bar
VR488	Manual solenoid valve	DN100	NC	6 bar
VR489	Manual solenoid valve	DN125	NC	6 bar
VR490	Manual solenoid valve	DN150	NC	6 bar

TECHNICAL FEATURES

Power supply 230 Vac – 24 Vcc/Vac – 12 Vcc/Vac

Body Die - Cast Aluminium Gd - AISi12Cu - EN AB 46100


Working temperature -15°C / +70°C

Closing time < 1 sec


Max. pressure 550 mbar/6bar

Protection level IP65

Connections Flanged DN65 - DN80 - DN100

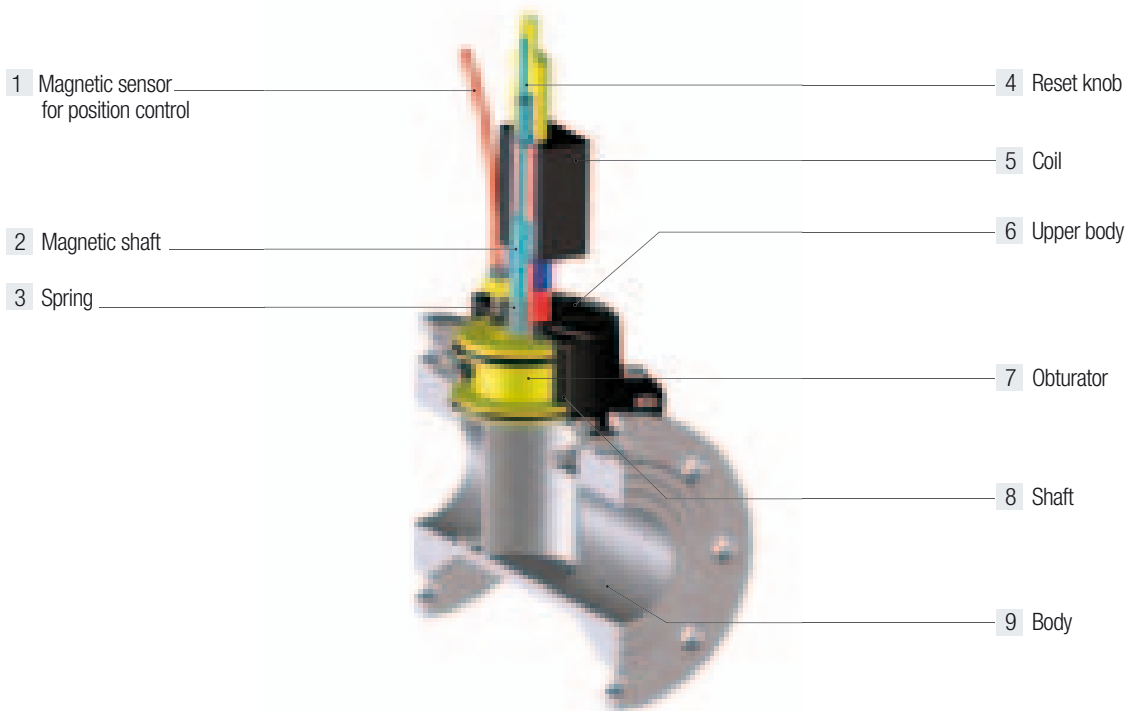

FLOW CHART

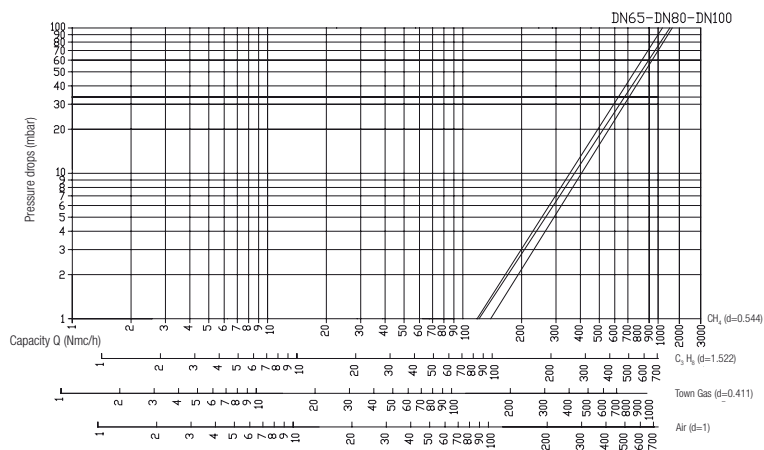

Dimension	Flow (mc/H)	Power	A (mm)	B (mm)	Approvals	Power supply
DN65 2" ½	170	6 W	246	395	Dir.97/23/CE-EN161	12Vcc
DN65 2" ½	170	9 VA	245	395	Dir.97/23/CE-EN161	230Vac
DN80 3"	170	6 W	265	395	Dir.97/23/CE-EN161	12Vcc
DN80 3"	170	9 VA	265	395	Dir.97/23/CE-EN161	230Vac
DN100 4"	280	6 W	265	420	Dir.97/23/CE-EN161	12Vcc
DN100 4"	280	9 VA	265	420	Dir.97/23/CE-EN161	230Vac

