

GAS FILTER ½", ¾", 1" – Pmax 6 bar



Code	Description	Dimension	Pmax
GF015	Gas filter	½"	6 bar
GF020	Gas filter	¾"	6 bar
GF025	Gas filter	1"	6 bar
GFD25	Gas filter	DN25	6 bar

GF015-TPIO	Gas filter with test point in/out	½"	6 bar
GF020-TPIO	Gas filter with test point in/out	¾"	6 bar
GF025-TPIO	Gas filter with test point in/out	1"	6 bar
GFD25-TPIO	Gas filter with test point in/out	DN25	6 bar

GF015-SP	Gas filter with screw plugs	½"	6 bar
GF020-SP	Gas filter with screw plugs	¾"	6 bar
GF025-SP	Gas filter with screw plugs	1"	6 bar
GFD25-SP	Gas filter with screw plugs	DN25	6 bar

TECHNICAL FEATURES

Operation maximum pressure 6 bar

Working Temperature - 20 °C – + 60 °C

Filtration 50 Micron

Use Non – aggressive gases – Family 1 – 2 – 3 and air

Cartridge element Viledon cartridge

Inlet - Outlet Connection Thread gas 1/2" – ¾" 1" – ISO 228
DN25 - Sliding Aluminium flange PN10

Complete Body Die – Cast Aluminium Gd – AISi12Cu - EN AB 46100

Seals NBR

Approval PED

Optional:


- Test point – NPT ¼"

- Screw – NPT ¼"


- Peters plug

- Manometer

- DP clogging indicator

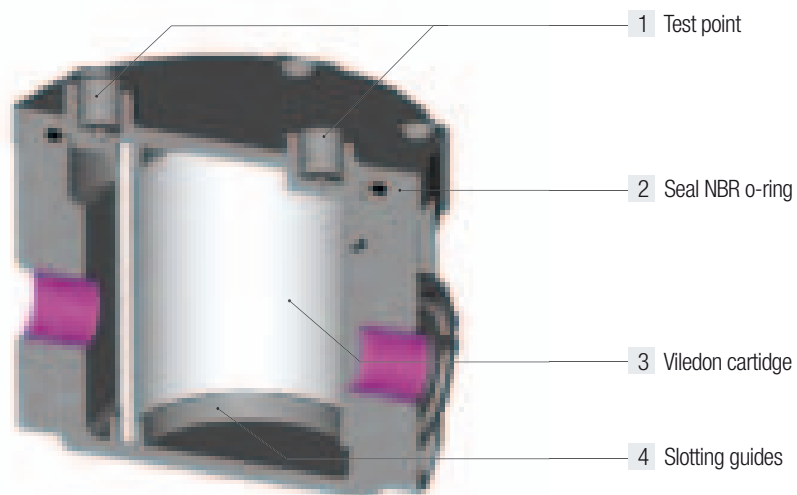

FLOW CHART

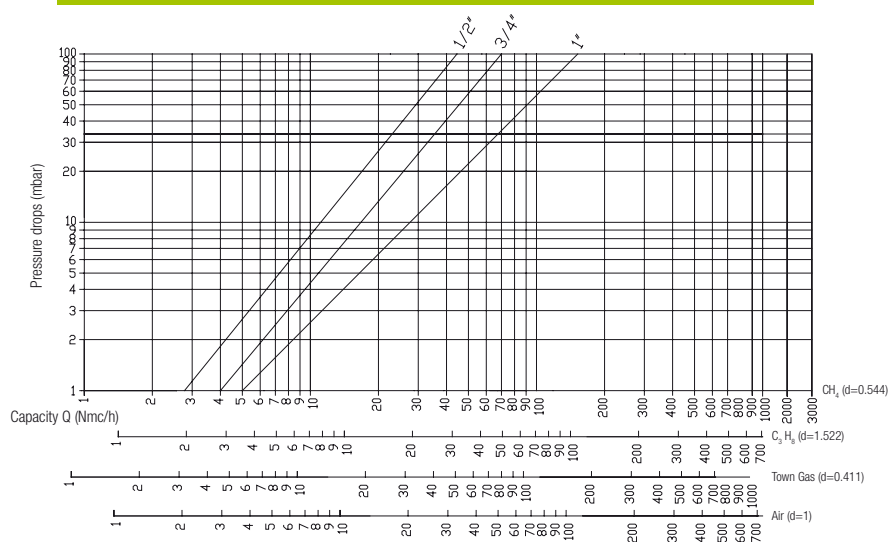

DIMENSIONS (mm) and WEIGHT (kgs)				
Dimension	A	B	C	Weight
1/2"	114	105.5	118.5	0,806
3/4"	114	105.5	118.5	0,795
1"	114	105.5	118.5	0,786

