


**GAS SOLENOID VALVE - Manual reset - Normally open - 6 bar -  
1/2" - 3/4" - 1" - 1 1/4" - 1 1/2" - 2"**




| Code  | Description           | Dimension | Type | Pmax  |
|-------|-----------------------|-----------|------|-------|
| VR929 | Manual solenoid valve | 1/2"      | NO   | 6 bar |
| VR930 | Manual solenoid valve | 3/4"      | NO   | 6 bar |
| VR932 | Manual solenoid valve | 1"        | NO   | 6 bar |
| VR933 | Manual solenoid valve | 1 1/4"    | NO   | 6 bar |
| VR934 | Manual solenoid valve | 1 1/2"    | NO   | 6 bar |
| VR935 | Manual solenoid valve | 2"        | NO   | 6 bar |

**TECHNICAL FEATURES**

|                            |                                                               |
|----------------------------|---------------------------------------------------------------|
| <b>Power supply</b>        | 230 Vca – 24 Vcc/Vca – 12 Vcc/Vca                             |
| <b>Body</b>                | Brass ST-CW617N – EN 12420 – Yellow Painted                   |
| <b>Working temperature</b> | -15°C / +70°C                                                 |
| <b>Closing time</b>        | < 1 sec                                                       |
| <b>Max. pressure</b>       | 6 bar                                                         |
| <b>Protection level</b>    | IP65                                                          |
| <b>Connections</b>         | Thread 1/2", 3/4", 1", 1" 1/4, 1" 1/2", 2" - ISO 228/1 thread |

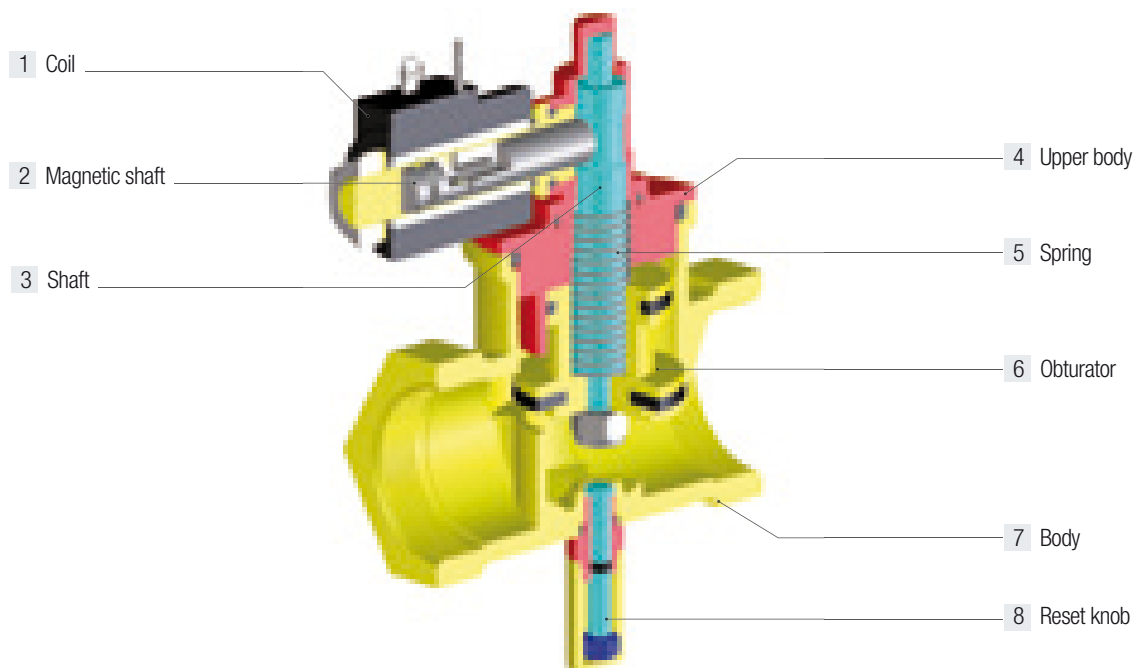

#### FLOW CHART

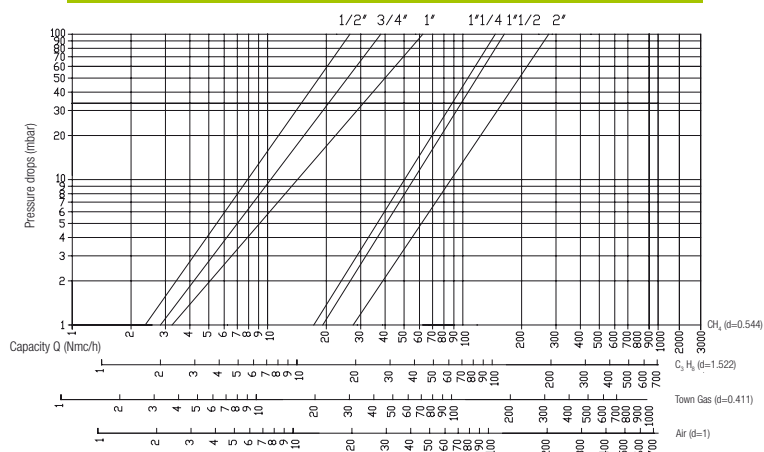

| Dimension | Flow (mc/H) | Power | A (mm) | B (mm) | Approvals           | Power supply |
|-----------|-------------|-------|--------|--------|---------------------|--------------|
| 1/2"      | 4,5         | 19 W  | 65     | 165    | -                   | 12Vcc        |
| 1/2"      | 4,5         | 17 VA | 65     | 165    | -                   | 230Vac       |
| 3/4"      | 6           | 19 W  | 65     | 165    | -                   | 12Vcc        |
| 3/4"      | 6           | 17 VA | 65     | 165    | -                   | 230Vac       |
| 1"        | 13          | 19 W  | 78     | 170    | Dir. 97/23/CE (PED) | 12Vcc        |
| 1"        | 13          | 17 VA | 78     | 170    | Dir. 97/23/CE (PED) | 230Vac       |
| 1 1/4"    | 40          | 19 W  | 114    | 195    | Dir. 97/23/CE (PED) | 12Vcc        |
| 1 1/4"    | 40          | 17 VA | 114    | 195    | Dir. 97/23/CE (PED) | 230Vac       |
| 1 1/2"    | 50          | 19 W  | 114    | 195    | Dir. 97/23/CE (PED) | 12Vcc        |
| 1 1/2"    | 50          | 17 VA | 114    | 195    | Dir. 97/23/CE (PED) | 230Vac       |
| 2"        | 80          | 19 W  | 139    | 200    | Dir. 97/23/CE (PED) | 12Vcc        |
| 2"        | 80          | 17 VA | 139    | 200    | Dir. 97/23/CE (PED) | 230Vac       |

